
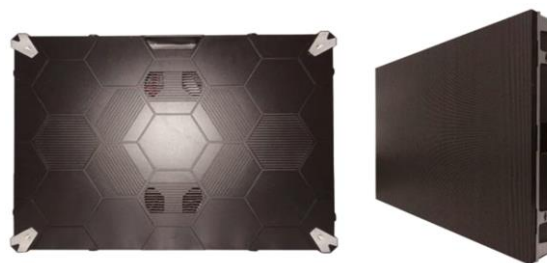


Contractor Indoor Series

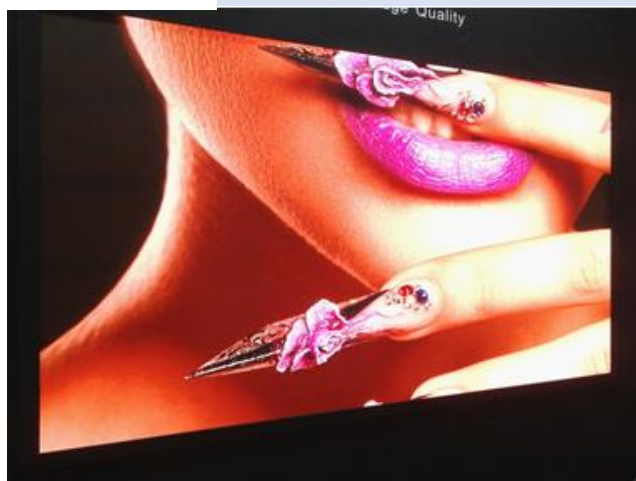

Front Access

Pixel Pitch	1.667mm	1.86mm	2.0mm	2.5mm
LED Type	SMD1212	SMD1515	SMD1515	SMD1515
Module Size	320mm × 160mm	320mm × 160mm	320mm × 160mm	320mm × 160mm
Module Resolution (W x H)	192 × 96 dots	172 × 86 dots	160 × 80 dots	128 × 64 dots
Dots per modules	18,432 dots	14,792 dots	12,800 dots	8,192 dots
Scan Mode	48	1/43	1/40	1/32
Cabinet Size (W x H x D)		640mm x 480mm x 80mm		
Cabinet Resolution (W x H)	384 × 288 dots	344 × 258 dots	320 × 240 dots	256 × 192 dots
Module Quantity (W x H)		2 x 3 = 6pcs		
Pixel Density/Cabinet	110,592 dots	88,752 dots	76,800 dots	49,152 dots
Cabinet Material		Die-cast Aluminum		
Cabinet Weight		10 Kg		
Max. Brightness		400--1000 nits		
Viewing Angles (W x H)		Horizontal 160° Vertical 140°		
Min. Viewing Distance	≥1.7 meters	≥1.9 meters	≥2.0 meters	≥2.5 meters
Gray-scale		16-bits		
Colors		281 Trillion		
Refresh rate		2880Hz or 3840Hz		
Input Voltage		100-240V / 50~60Hz		
Power Consumption (Max./Ave.)		600 / 200 W/m ²		
MTBF		>10,000 hours		
Life-span		≥100,000 hours		
IP-rating (Front & Rear)		IP45		
Operating Temperatures		- 20°C to +60°C		
Operating Humidity		10% to 60% RH		
Control System		Colorlight/Novastar - Synchronous/Asynchronous		
Source Compatibility (with video processor)		DVI, HDMI, VGA, SDI, DP,		

www.digitallightwindows.com

Company address: The Denstudio Ltd., 4A SPA Centre, 53-55 Lockhart Road, Wanchai, HK

Tel.: (852) 2528 2980 E-mail: info@thedenstudio.com